

BERTA

MEDIUM ROUND



Round bulkhead lamp with **no visible screws**, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. **GX53 LED** or **E27** version available. Insulation class II, Protection rating IP66.



*Plafoniera circolare **senza viti a vista**, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Disponibile nella versione **GX53 LED** o **E27**. Classe di isolamento II, grado di protezione IP66.*



1B2.000

UV TREATED	DOUBLE INSULATION		PUBLIC	RESIDENTIAL	INDOOR OUTDOOR
RECYCLABLE	ANTI-SHOCK	TEMPERATURE	WALL	CEILING	



BERTA - COMPONENTS

IP 66



COVER with no visible screws made of shockproof resin material, UV-rays stabilized.

COVER senza viti a vista realizzata in resina antiurto stabilizzata ai raggi UV.

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA) screwed to the bulkhead base.

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare alla base della plafoniera.

BASE made of shockproof resin material, UV-rays stabilized. Provided with GX53 lampholder or with white resin reflective plate and E27 lampholder. Complete with silicone rubber gasket to ensure high protection against external agents.

BASE realizzata in resina antiurto, stabilizzata ai raggi UV. Fornita completa di portalamпада GX53 o di piatto riflettente in resina bianca e portalamпада E27. Completa di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

BERTA



Dimensions and weight

Diameter: ø 270 mm
Depth: 80 mm
Weight: 1 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

GX53 LED

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** and complete with TÜV approved, long-life and efficient **GX53 LED lamp included**. Different wattage available.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** Quick and easy lamp replacement for a very simple maintenance after installation.

*ADD. SUFFIX

	7 W	600 Lm	4000 K	.A1L
			3000 K	.A1R
	11 W	1300 Lm	4000 K	.B1L
			3000 K	.B1R
	18 W	2000 Lm	4000 K	.E1L
			3000 K	.E1R

E27

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** with **E27 lampholder**. White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.

Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).

*ADD. SUFFIX

E27 (CFL -LED)	max 160 mm ↔	.P27
E27 + SENSOR (CFL -LED)		.PS7

LED LAMPS



More technical details about TÜV approved Fumagalli LED Lamps on page 512.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE



7W
11W
18W

=


60W
100W
150W


incandescent

SAVE 90%

BERTA

MEDIUM ROUND

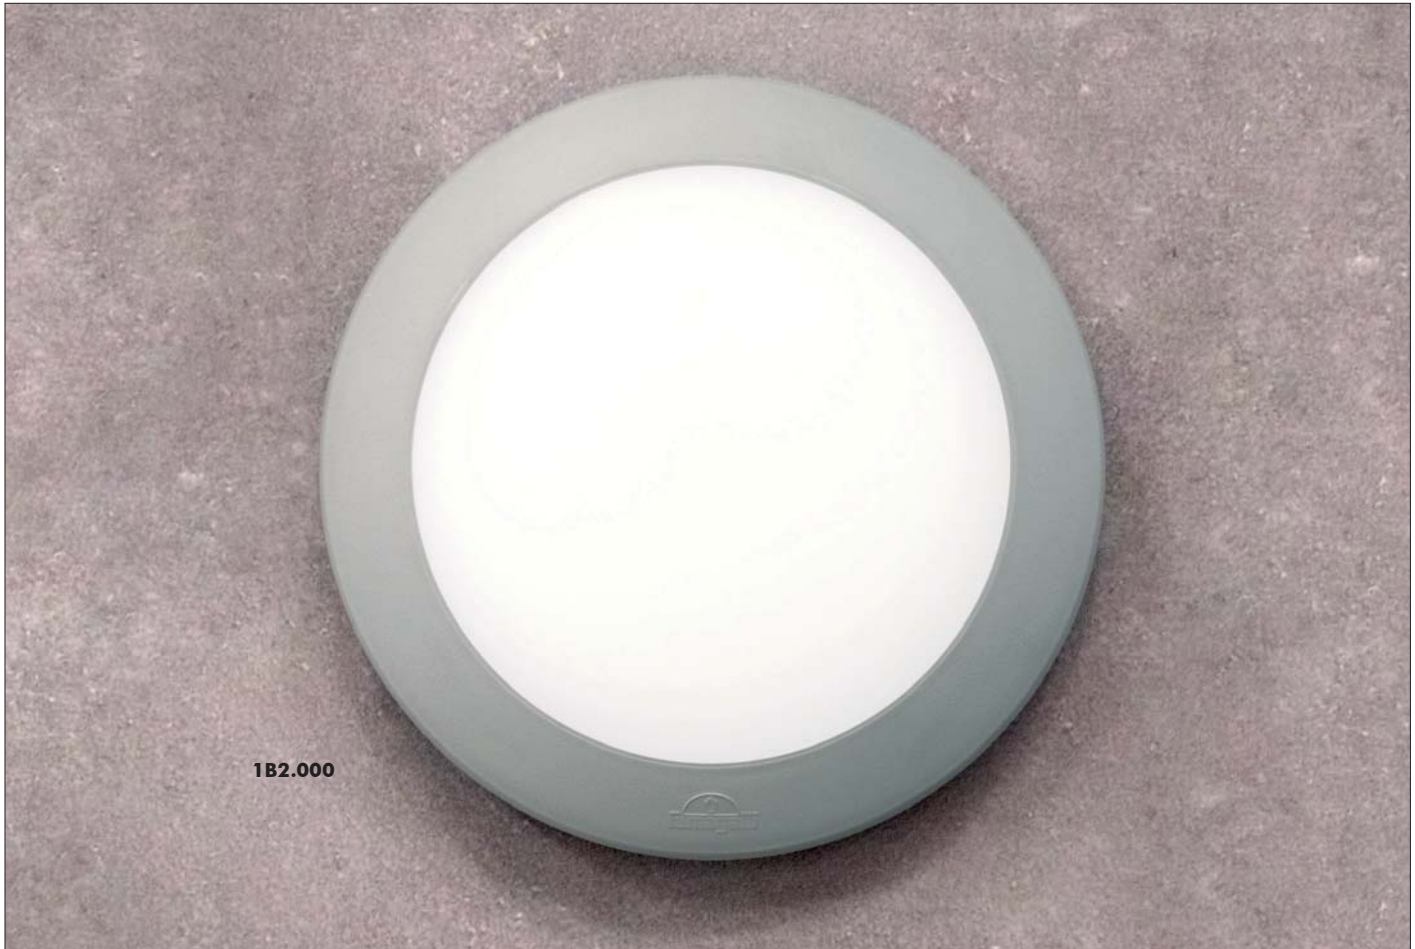

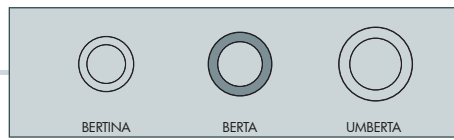

BERTA GX53		
1B2.000.A1L	7W	1B2.000.A1R
1B2.000.B1L	11W	1B2.000.B1R
1B2.000.E1L	18W	1B2.000.E1R
4000K	GX53 LED LAMP INCLUDED	3000K
Pcs 16		
Kg 20		
mc 0,194		

BERTA E27	
E27 lampholder	1B2.000.P27
E27 with sensor	1B2.000.PS7
Pcs 16	
Kg 16,8	
mc 0,194	